The router with more performance

NEW



FRE317S

Tiltable router

Professional router for wood and solid surface materials. Specially designed for installing or repairing Corian®. Its features make the FRE317S the perfect machine for the Corian® installation.



Virutex®

Professional solutions

FRE317S

Tiltable router

The router with more performance


Powerful motor (1800 W) with electronic speed control from 11500 to 23000/min.

Exclusivity. The only tiltable router.

Equipped with 12 mm chuck collet and reducers for Ø 10, 8 and 6 mm.

Routing depth: 100 mm.

Equipped with an additional base for working with Corian®. It is also possible to use copying guide rings.

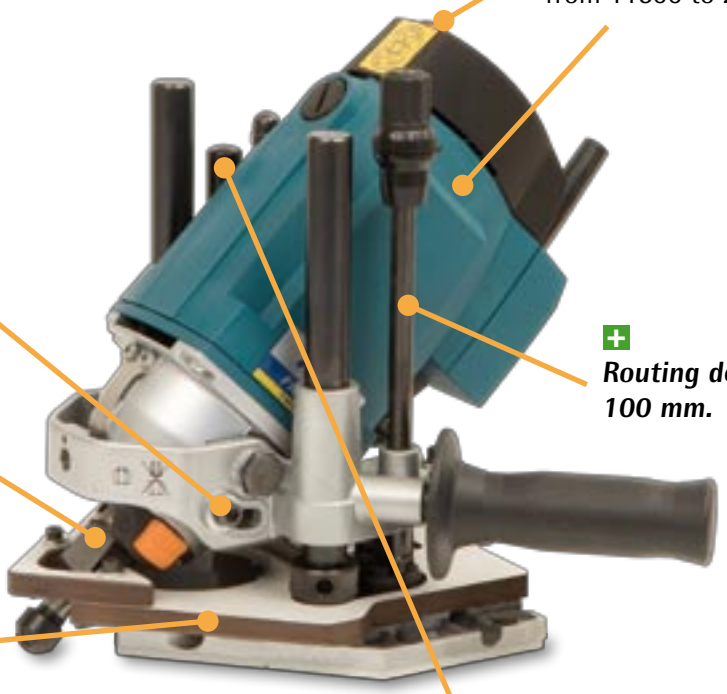

Exclusivity. Equipped with a gaz buffer for the vertical movement, for the routing of joints on Corian® worktops.


Powerful motor (1800 W) with electronic speed control from 11500 to 23000/min.

Cutting depth with micrometric adjustment.

The routing base allows to work with copying guide rings.

Adjustable stopper with 6 routing depth positions.

Lateral fence with micrometric adjustment.

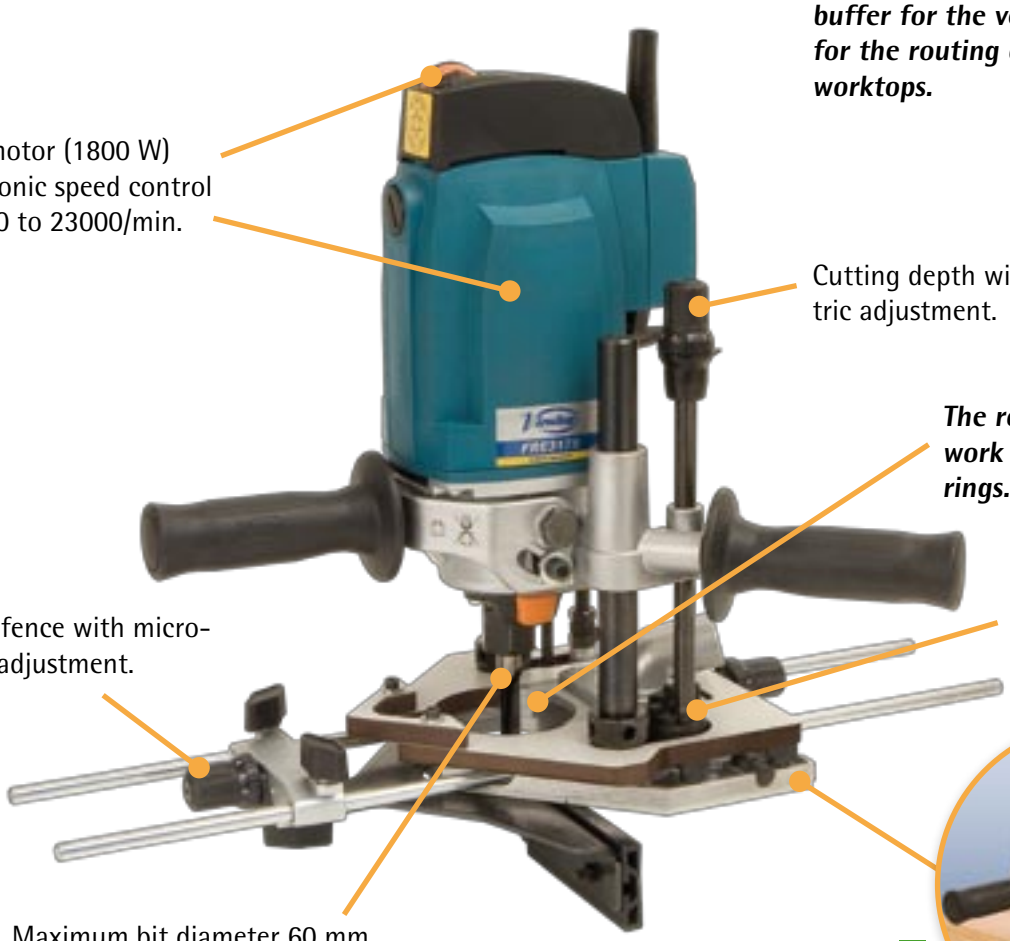

Maximum bit diameter 60 mm.



Big support surface for trimming works on edges.

Optional accessories

FRE317S Router





Cutting guide UF317S (with suction pads)
For a guided routing. Allows a stable and perfect finishing on repairing works.



Set of suction pads
For fixing the machine when drilling holes or caps on Corian® worktops.

Acessories:
Additional guide for UF317S 1.40 m
Additional guide for UF317S 2.40 m
Jointing kit for 2 guides
Set of 2 clamp screws



Clamping device ASU317S
Allows a solid and stable fixing when gluing two panels.



Elastic clamping device ATU317S
Allows to fix two panels at a different angle, when gluing them.




Routing guide UC317S
For routing in an easy way the gutters on Corian® worktops.
Length, depth and inclination are adjustable.

Optional accessories

FRE317S Router



PL11 Dovetailing attachment
Precission attachment for dovetail jointing

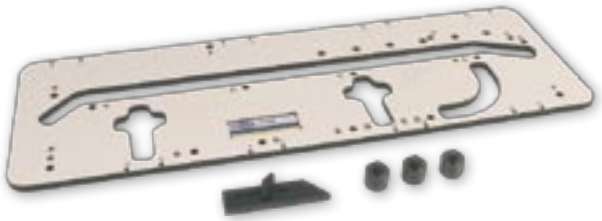

PFE60 Template for trimming worktops
Specially designed for trimming and assembling worktops from 420 mm to 650 mm width.




PE60 Template for trimming ellipses and circles
Multiradius template for trimming circular or elliptical forms. Ideal for manufacturing mirrors, windows, doors or any other decorative items by means of an elliptical or circular trimming.



UC60 Universal compass guide
For trimming circles between 400 and 3200 mm.

Specifications FRE317S

Input power	1800 W
Standard chuck collet	12 mm
Routing depth	0-100 mm
No-load speed	11500-23000/min
Max. bit Ø	60 mm
Weight	5.5 kg

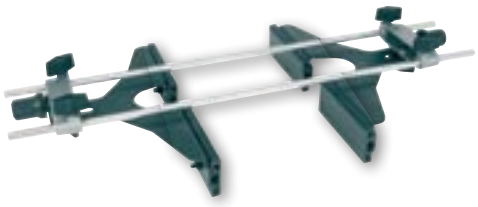

Double fence accessory

www.virutex.es

Virutex, S.A. • Antoni Capmany, 1 • 08028 Barcelona (Spain) • Tel. +34-934 329 888 • Fax +34-934 329 889 • E-mail: export@virutex.es

Specifications subject to change without previous notice.
Corian® is a trade mark of E.I. du Pont de Nemours and Company.